
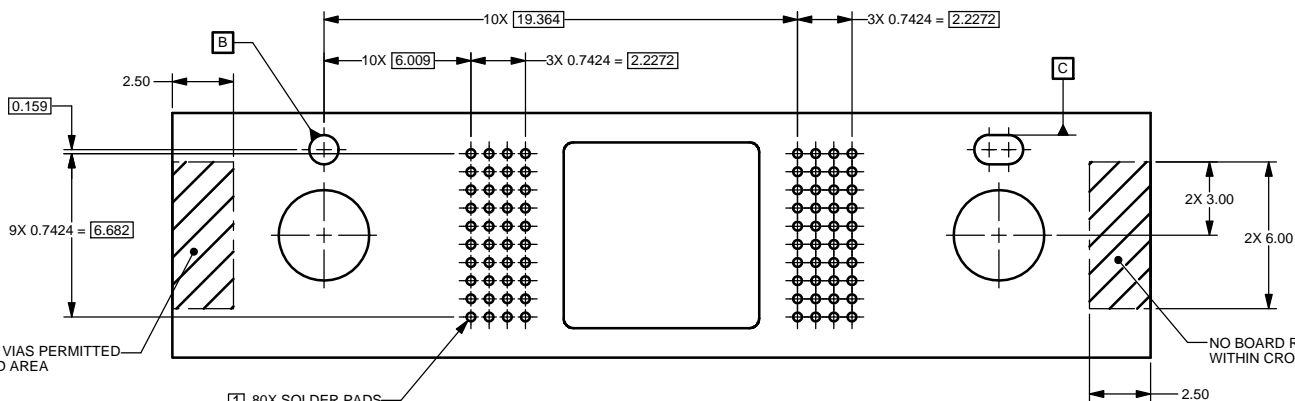


NOTES: UNLESS OTHERWISE SPECIFIED:

1 SEE INTERPOSER SUPPLIER FOR RECOMMENDED PAD DIAMETER

© COPYRIGHT 2013 TEXAS INSTRUMENTS
UNPUBLISHED, ALL RIGHTS RESERVED

DWG NO 2513115		SHEET 1	1	
S	REVISIONS			
	REV	DESCRIPTION	DATE	BY
	A	INITIAL RELEASE	2/20/2013	DH

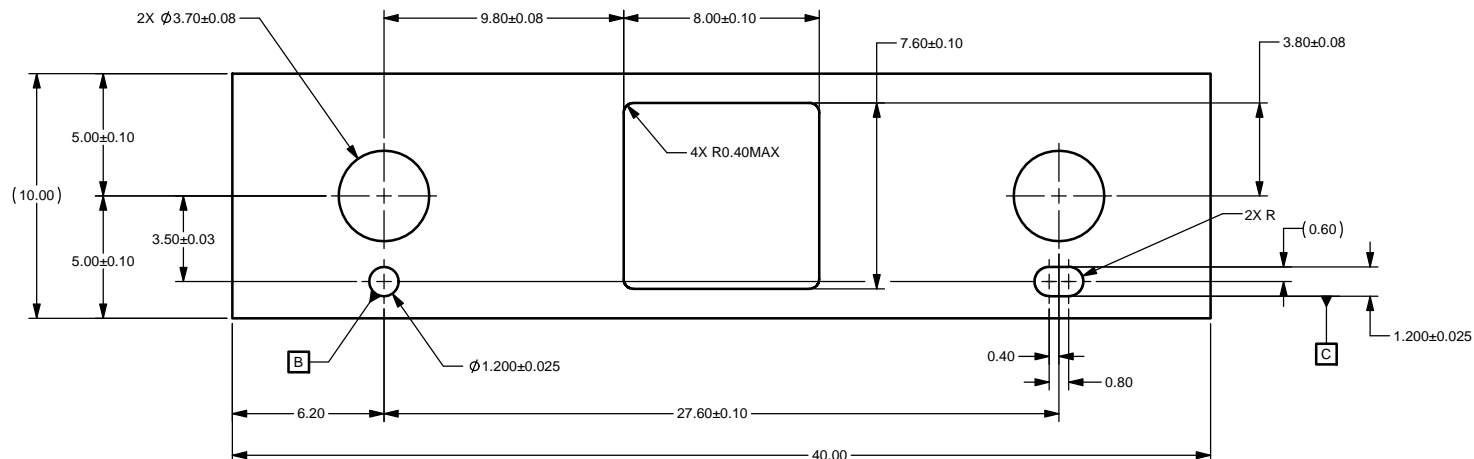

NO BOARD ROUTING OR VIAS PERMITTED
WITHIN CROSS-HATCHED AREA

NO BOARD ROUTING OR VIAS PERMITTED
WITHIN CROSS-HATCHED AREA

1 80X SOLDER PADS
 $\phi 0.360 \pm 0.040$
 $\phi 0.100$ A B C



UNLESS OTHERWISE SPECIFIED

- DIMENSIONS ARE IN MILLIMETERS
- TOLERANCES: ANGLES $\pm 1^\circ$
2 PLACE DECIMALS ± 0.25
1 PLACE DECIMALS ± 0.50
- DIMENSIONAL LIMITS APPLY BEFORE PROCESSES
- INTERPRET DIMENSIONS IN ACCORDANCE WITH
ASME Y14.5M-1994
- REMOVE ALL BURRS AND SHARP EDGES
- PARENTHEetical INFO FOR REF ONLY

DWN
HOLAMON
Eng
CDE/GA
CM
Appvd

DATE
2/15/2013

TEXAS
INSTRUMENTS

FLEX CIRCUIT, DMD CONCEPT #3,
SERIES 310 DMD

SIZE
B

DWG NO
2513115

REV
A

SCALE 5:1

SHEET 1 OF 1