

Specification:

Contact Resistance: 30mΩ Max.


Insulation Resistance: 100MΩ Min. at DC 500V

Withstand voltage: AC 500V for 1 min.


Operating life: 5,000 cycles at 15-20 cycles per minute, unloading

MINIATURE PHONE JACKS

MSJ-035-26

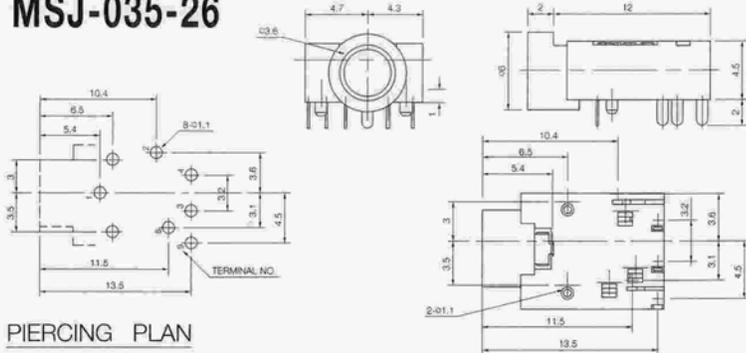


PIERCING PLAN

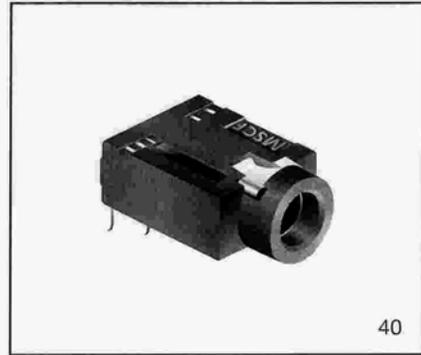

40

MSJ-1537



SCHEMATIC




PIERCING PLAN




41


MSJ-1637



SCHEMATIC

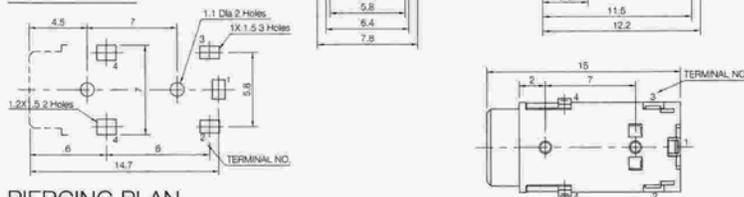


PIERCING PLAN

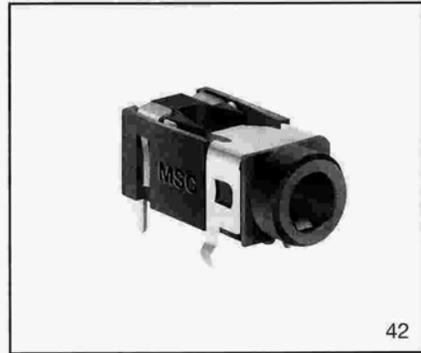


42

MSJ-2000



SCHEMATIC

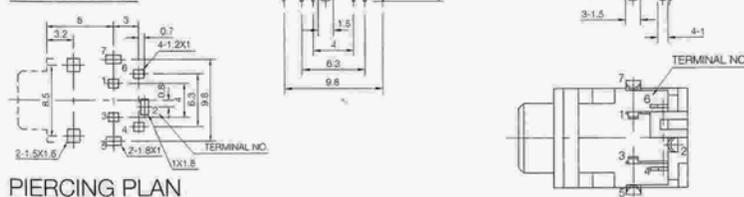

PIERCING PLAN



43