

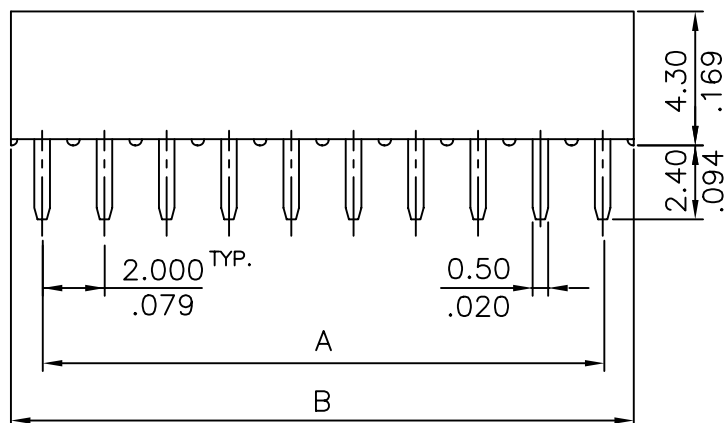


* * * 2041 Series * * *



Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2	2.000(.079)	4.50(.177)	21	40.000(1.575)	42.50(1.673)
3	4.000(.157)	6.50(.256)	22	42.000(1.654)	44.50(1.752)
4	6.000(.236)	8.50(.335)	23	44.000(1.732)	46.50(1.831)
5	8.000(.315)	10.50(.413)	24	46.000(1.811)	48.50(1.909)
6	10.000(.394)	12.50(.492)	25	48.000(1.890)	50.50(1.988)
7	12.000(.472)	14.50(.571)	26	50.000(1.969)	52.50(2.067)
8	14.000(.551)	16.50(.650)	27	52.000(2.047)	54.50(2.146)
9	16.000(.630)	18.50(.728)	28	54.000(2.126)	56.50(2.224)
10	18.000(.709)	20.50(.807)	29	56.000(2.205)	58.50(2.303)
11	20.000(.787)	22.50(.886)	30	58.000(2.283)	60.50(2.382)
12	22.000(.866)	24.50(.965)	31	60.000(2.362)	62.50(2.461)
13	24.000(.945)	26.50(1.043)	32	62.000(2.401)	64.50(2.539)
14	26.000(1.024)	28.50(1.122)	33	64.000(2.520)	66.50(2.618)
15	28.000(1.102)	30.50(1.201)	34	66.000(2.598)	68.50(2.697)
16	30.000(1.181)	32.50(1.280)	35	68.000(2.677)	70.50(2.776)
17	32.000(1.260)	34.50(1.358)	36	70.000(2.756)	72.50(2.854)
18	34.000(1.339)	36.50(1.437)	37	72.000(2.835)	74.50(2.933)
19	36.000(1.417)	38.50(1.516)	38	74.000(2.913)	76.50(3.012)
20	38.000(1.496)	40.50(1.594)	39	76.000(2.992)	78.50(3.091)
			40	78.000(3.071)	80.50(3.169)

leoco 臺灣龍傑股份有限公司
LEOCO CORPORATION

GENERAL TOLERANCE

.X \pm 0.30
.012 .X° \pm 1°

.XX \pm 0.20
.008 .XX° \pm 0.5°

.XXX \pm 0.10
.004 .XXX° \pm 0.1°

APPROVED BY:

PART NO.:

2041S**V*00

CHECKED BY:


TITLE: 2.00mm(.079")
Single Row
PCB Connector

DRAW BY:

DRAWING NO.:

Dora W. 07/13/'96

204101S



UNITS

mm/inch

SCALE

4/1

SIZE

A4

SHEET

1/2

REV.

C

C	E960410		
B	E960373		
A	Spec-87		
REV.	ECO. NO.	CHG	APPD.

Material:

* Insulator : UL 94V-0 Nylon 6T + 30% Glass Fiber

* Contact : Phosphor bronze

Ordering Information :

2041 S $\frac{**}{1}$ V $\frac{*}{2}$ 00

1. No. of circuits.

2. Plating :

T= Tin plated 120?" min. over 30~50?" nickel overall

U= Gold flash over 30~50?" nickel overall


W= 15?" gold over 30~50?" nickel overall

Z= 30?" gold over 30~50?" nickel overall



F= Selective gold flash over 30~50?" nickel overall

J= 15?" gold plated selective over 30~50?" nickel overall

K= 30?" gold plated selective over 30~50?" nickel overall

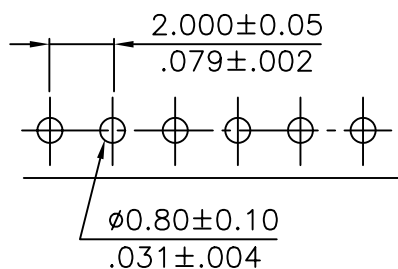

Recommended Hole Pattern

				 臺灣龍傑股份有限公司 LEOCO CORPORATION		APPROVED BY:		PART NO.: 2041S**V*00			
				GENERAL TOLERANCE		CHECKED BY:		TITLE: 2.00mm(.079") Single Row PCB Connector			
C	E960410			$.X \pm \frac{0.30}{.012}$	$.X^{\circ} \pm 1^{\circ}$	DRAW BY: Dora W. 07/13/'96		DRAWING NO.: 204101S			
B	E960373			$.XX \pm \frac{0.20}{.008}$	$.XX^{\circ} \pm 0.5^{\circ}$						
A	Spec-87			$.XXX \pm \frac{0.10}{.004}$	$.XXX^{\circ} \pm 0.1^{\circ}$		UNITS	SCALE	SIZE	SHEET	REV.
REV.	ECO. NO.	CHG	APPD.				mm/inch	4/1	A4	2/2	C