

# LMX9820A to LMX9838 Conversion Guide

## 1.0 LMX9838

The Texas Instruments LMX9838 Bluetooth® Serial Port module is the next generation of the LMX9820A. The LMX9838 is a complete self contained

design which includes some key changes that must be considered in the system design and implementation. Table 1 on page 1 summarizes differences between LMX9820A and the LMX9838.

**Table 1. LMX9820A vs. LMX9838**

Specification	LMX9820A	LMX9838	Changes details
Main clock Frequency range	12 MHz Recommended External	13 MHz Internal	The LMX9838 has a fixed internal 13 MHz crystal
Reset Baseband and Reset Radio	Reset Baseband and Reset Radio are tied together and driven externally	A single Reset pin (Pad 2) Reset# is driven externally, and will put both the Radio and Baseband into the Reset state	
Physical	116 Pins FR4 10.1mm x 14.1mm x 2.0mm	70 Pins LGA 10mm x 17mm x 1.85mm	Reference LMX9838 dongle design
Low Power Modes	32.768 kHz Supported in version 6.23 Firmware	32.768 kHz Supported	See Section 2.0 "Optional 32 kHz For LOW Power"
Antenna design	External	Internal chip antenna	
Bluetooth settings memory	Internal Flash	ROM based Internal EEPROM	See LMX9838 datasheet and Software Users Guide
BD address	Organized by National - Included in Flash	Organized by National - Included in EEPROM	
Firmware update	Flash based, using ISP software	ROM based, no upgrade possible, Patch support for partial replacement	Using Patch RAM mechanism See Section 3.0 "Firmware Upgrade And Patch RAM"
Additional features	Normal scan Up to 3 active links	Interlaced scan Up to 7 active links Scatternet supported Audio PCM slave Adaptive Frequency Hopping	
Command set			See Section 4.0 "Command Set" and LMX9838 Software Users Guide

## 2.0 Optional 32 kHz For LOW Power

On the LMX9838 a second oscillator is provided that is tuned to provide optimum performance and low-power consumption while operating with a 32.768 kHz crystal. By using this 32 kHz the current consumption can be reduced from 2.5 mA to 430  $\mu$ A in low power mode PM2 (See Table 3 "Power Mode Activity").

An external crystal clock network is required between the 32k+ clock input (pad 27) and the 32k- clock output (pad 28) signals. The oscillator is built in a Pierce configuration and uses two external capacitors. Table 2 provides the oscillator's specifications.

In case the 32 kHz is placed optionally, it is recommended to remove C2 and replace C1 with a zero ohm resistor.

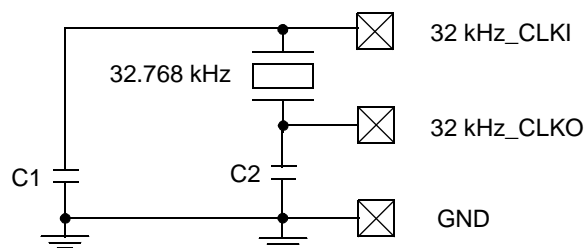


Figure 1 32.768 kHz Oscillator

Table 2. 32.768 kHz Oscillator Specifications

Symbol	Parameter	Condition	Min	Typ	Max	Unit
V <sub>DD</sub>	Supply Voltage		1.62	1.8	1.98	V
I <sub>DDACT</sub>	Supply Current (Active)			2		$\mu$ A
f	Nominal Output Frequency			32.768		kHz
V <sub>PPOS</sub>	Oscillating Amplitude			1.8		V
	Duty Cycle		38	48.3	58	%

Table 3 "Power Mode Activity" sums up the different low power modes available with the LMX9838. Note that using the optional 32 kHz oscillator will improve the current consumption only for the low power mode PM2. For more information on Low Power mode operation on LMX9838 please refer to the LMX9838 datasheet and the Software Users Guide

Table 3. Power Mode Activity

Power Mode	UART activity	Radio activity	Reference Clock
PM0	OFF	OFF	none
PM1	ON	OFF	Main Clock
PM2	OFF	Scanning	Main Clock / 32.768kHz
PM3	ON	Scanning	Main Clock
PM4	OFF	SPP Link	Main Clock
PM5	ON	SPP Link	Main Clock

## 3.0 Firmware Upgrade And Patch RAM

The LMX9838 firmware is included in ROM and therefore can not be updated. To still be able to correct small errors or to do minor modifications to the software, the LMX9838 offers the so called "Patch" mechanism, which basically allows to replace small parts of the ROM code. This patch code is held in RAM and needs to be provided during "Initialization Mode", in which it is either read from EEPROM or pushed by the host.

For more information about the Patch RAM mechanism please refer to the LMX9838 Software User's Guide.

## 4.0 Command Set

The command set changed slightly from LMX9820A to LMX9838. Some commands specific to the LMX9838 have been added and some have been removed.

### 4.1 REMOVED COMMANDS AND EVENTS

Below is the list of the commands removed from the LMX9838 command set:

- Store SPP Record
- Store DUN Record
- Store FAX Record
- Store OPP Record
- Store FTP Record
- Store IrMCSync Record

### 4.2 ADDED COMMANDS

Below is the list of the commands added to the LMX9838 command set:

- Set Clock Frequency
- Get Clock Frequency
- Set PCM Slave Configuration
- Enter Bluetooth Mode
- Set Clock And Baud Rate
- Get Pin response

- Replacing “Firmware upgrade” command to “Write ROM Patch”: Using same opcode. See SimplyBlue Commander User’s Guide for how to use the Write ROM Patch command

- Read Memory
- Write Memory
- Read NVS
- Write NVS
- Set GPIO WPU
- Get GPIO Input State
- Set GPIO Direction
- Set GPIO Output High
- Set GPIO Output Low

### 4.3 ADDED EVENTS/INDICATORS

Below is the list of the events or indicators added to the LMX9838 command set:

- Pin Request
- Await Initialization

For a detailed list of the functionality of those commands and how to use them, please refer to the LMX9838 Software User’s Guide.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)